


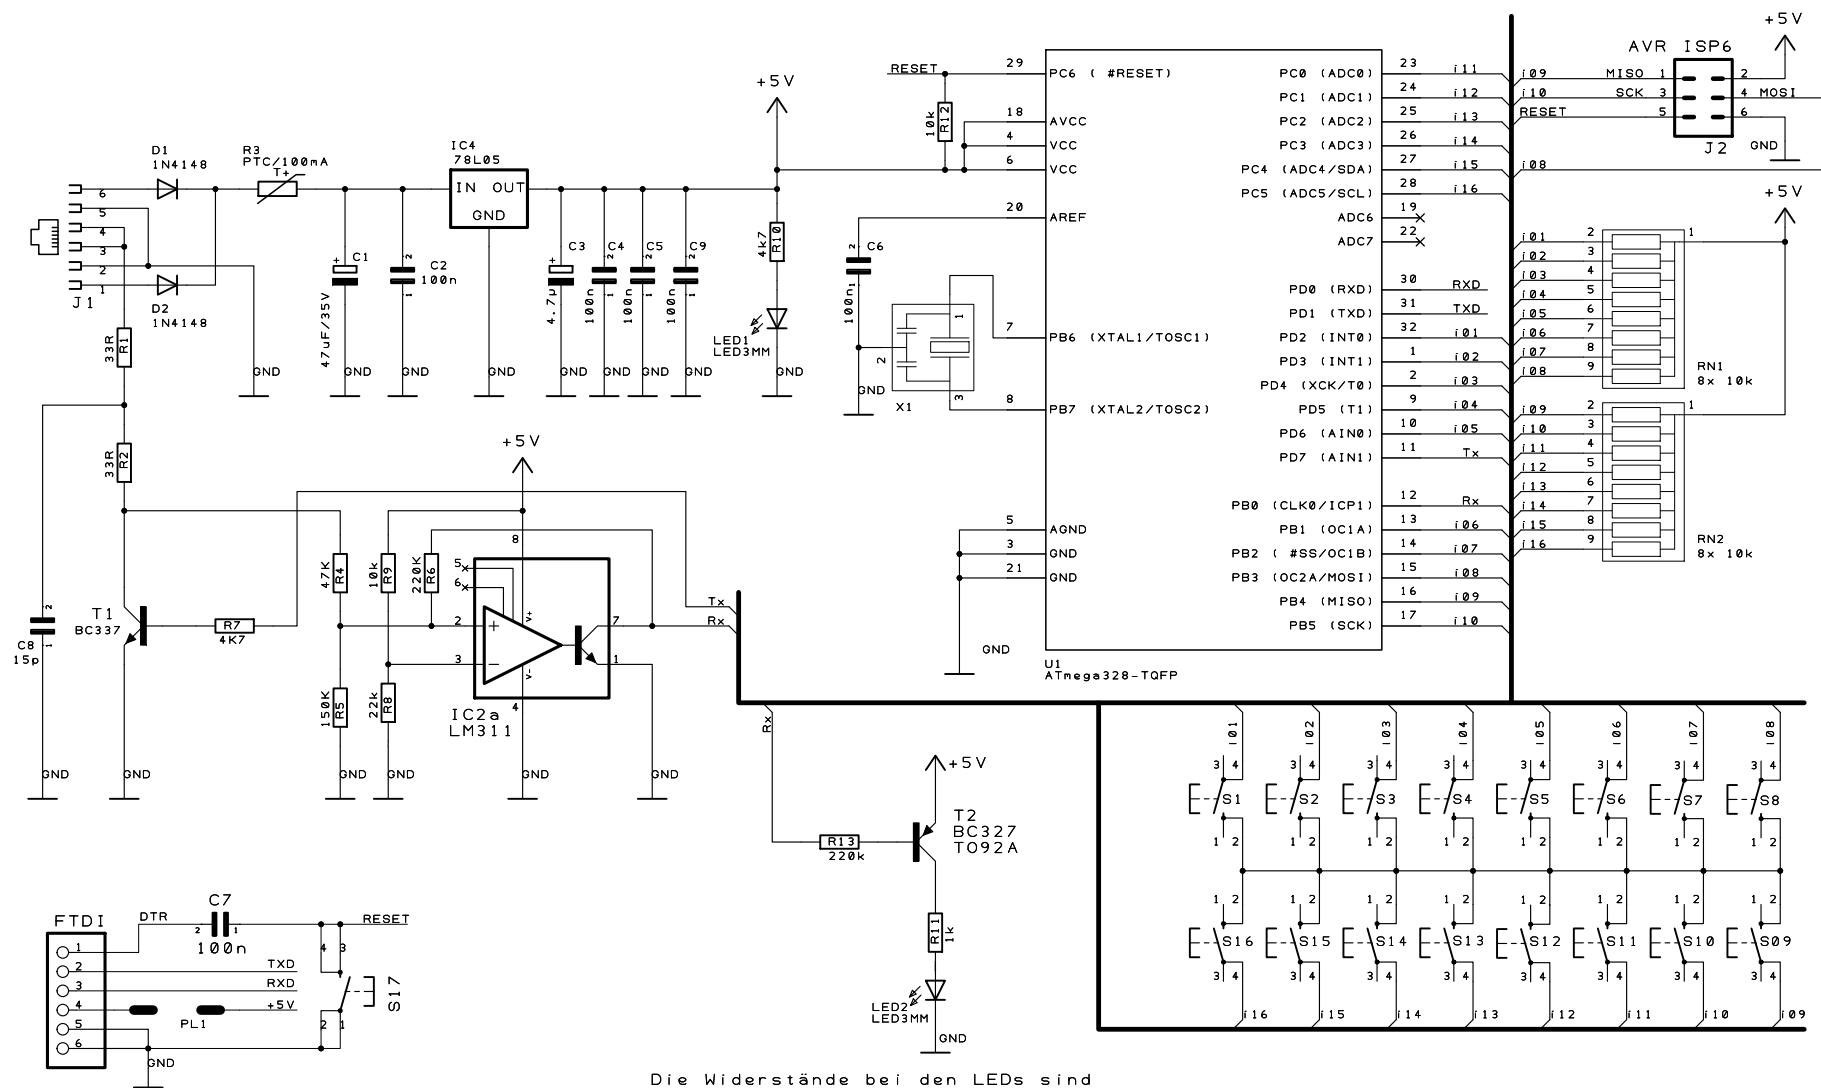

Die Widerstände bei den LEDs sind an die Leuchtstärke anzupassen

LocoIno by Dani Guisado
www.clubncaldes.com

```
PIN ASSIGNMENT:
0,1 -> Serial, used to debug and Loconet Monitor (uncomment DEBUG)
2,3,4,5,6 -> Configurable I/O from 1 to 5
7 -> Loconet TX
8 -> Loconet RX
9,10,11,12,13 -> Configurable I/O from 6 to 10
A0,A1,A2,A3,A4,A5-> Configurable I/O from 11 to 16
```

PROJECT:		LocoNet Keypad with Arduino		
DRAWING TITLE:		LocoIO-A Keypad		
DRAWN BY:		Sim&IT	REVISION: 1.3	
SHEET: 1 OF 1		STATUS:		
DATE: 05.10.2024				